

Roller Blind




DC44 SOFT ROLL



Chain-operated roller blind-Demultiplier clutch

The roller blind Soft Roll with Geared-Down Clutch is an elegant and functional solution for natural light management, making it a perfect choice for residential, professional and hospitality environments. Thanks to the geared-down clutch, operation is easy and smooth, requiring minimal effort even for large sizes. The chain control allows for simple and precise opening and closing. This system is compatible with dim-out, blackout and reflective fabrics to meet different solar protection and privacy requirements. Wall and ceiling fixing components are designed to ensure quick and safe installation (e.g. Easy Block).

Exploded View and dimensions

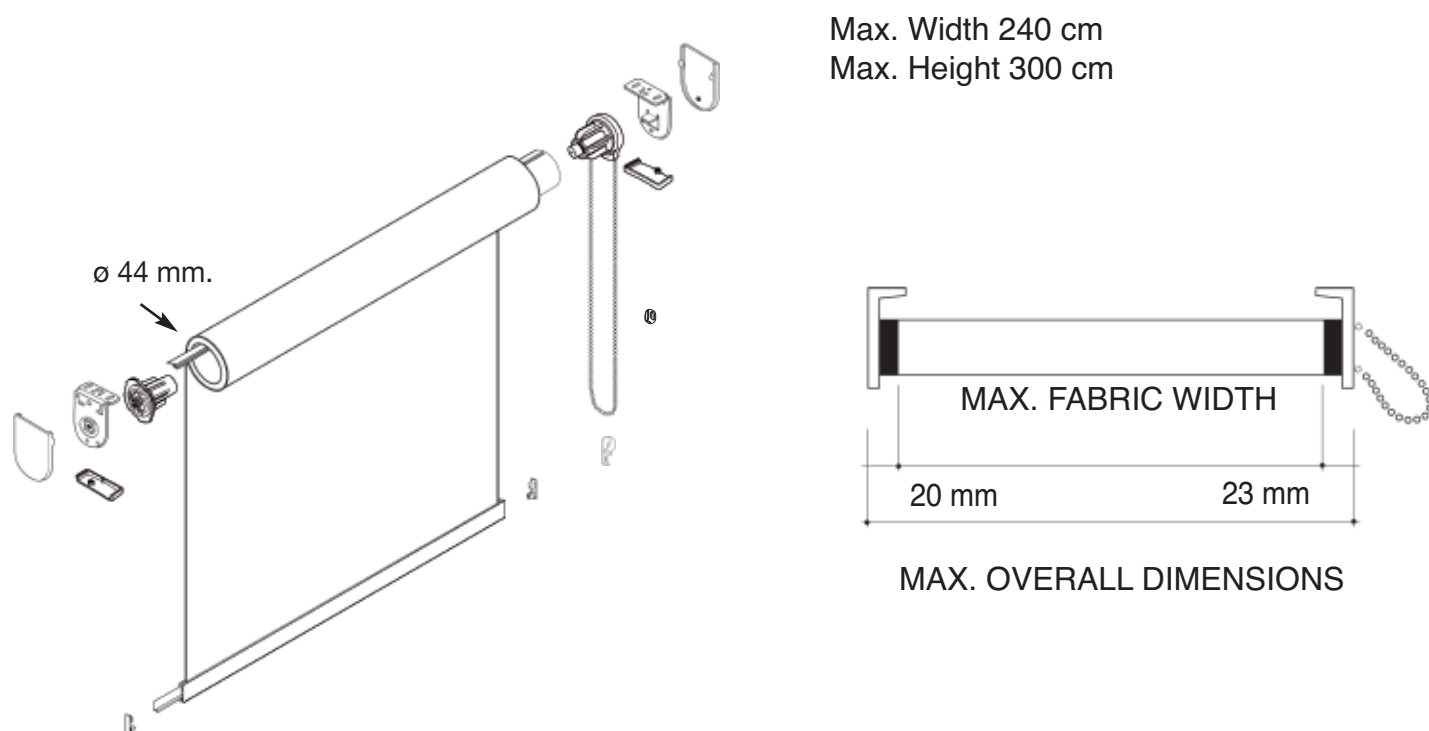

Roll types

Standard



Optional



Roll type B recommended to cover window handle clearance

Children's security system

Standard


Art. 3238



Art. 3238 - Child safety system with transparent safety cord tensioner
Child safety systems. Everyday objects in the home can represent a potential hazard for children, especially blind cords and chains. To prevent children from becoming entangled in blind cords or chains, with the risk of strangulation, it is recommended to keep beds and cots away from windows fitted with blinds. Rilox Italia offers a range of products designed for safe use in compliance with the UNI EN 13120:2014 standard. Roller blinds: chain-operated systems supplied with the safety chain tensioner Art. 3238, designed to prevent the chain from hanging loose and to keep it out of children's reach.

Chain control

Standard



Art. 3200R - Continuous chain loop, pitch 6x4,5

- 1 Bianco *White*
- 2 Nero *Black*
- 6 Grigio *Grey*

Geared-down clutch

Standard




Technical features:

- Spring made of high-performance piano wire, offering stable and long-lasting locking
- Heat-treated steel core that guarantees longer service life and higher wear resistance
- Top-quality technopolymer central body, with high resistance to abrasion and deterioration
- The clutch sleeve is reinforced with a steel core
- The crown features a planetary gear for a 6 mm chain, ensuring smooth and effortless operation
- Transmission component with lubricated pins and housing for 6 toothed wheels
- The flared chain-guide eyelet allows easy blind operation, even from an off-center position
- Max. load: 6 kg
- Available colours: white, grey, black

Easy Block End Plug

Standard

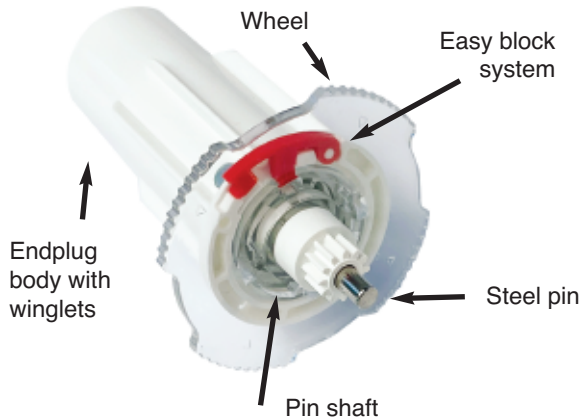

Technical features:

- The wheel has been designed to allow quick hooking and unhooking of the support
- Easy Block system, designed to lock the wheel and prevent accidental release
- Chromed steel pin that guarantees strength and silent operation
- Pin shaft equipped with a spring, allowing a +15 mm tolerance during installation
- End-plug body with winglets for easy and precise fitting with 44 mm tubes
- Available colours: white, grey, black

Supports for clutch and end plug

Standard




Technical features:

- High-quality steel plates
- Ceiling or wall fixing
- Suitable for 44 mm blinds
- Carter and screw cover in high-quality technopolymer with protective film
- Magnets for quick hooking and unhooking
- Simple and refined design
- Available colours: white, grey, black

Ø44 mm tube Art.8654

Standard

Channel for concealed coextruded plastic profile

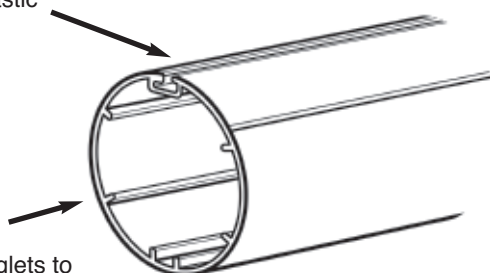

Technical features:

Extruded aluminium alloy roller tube:


- 6060 T6 extruded aluminium alloy tube compliant with UNI EN 755-9

Fixing with Art. 8601K supports



Standard



Ceiling

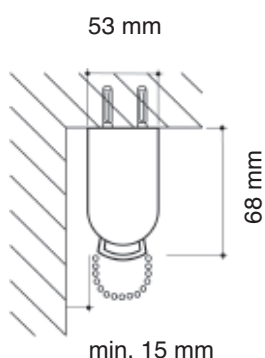


Wall

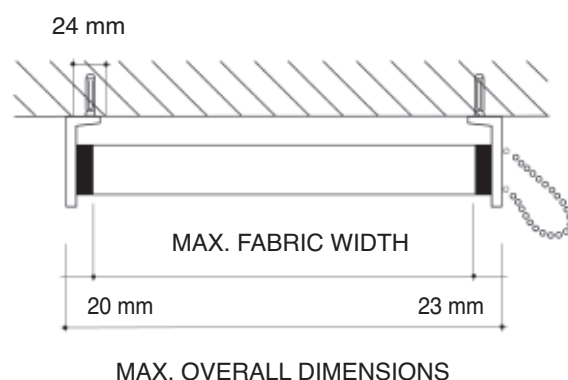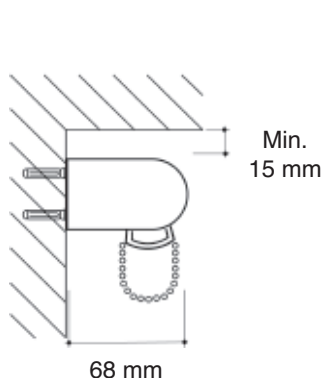

Fixing with concealed support bar art.8650

Optional



Art. 8527

Art. 8632

Art. 8633




Art. 8650 - 14 x 53 of extruded aluminium alloy 6060 T6, UNI EN 755-9, with Qualicoat-approved polyester-resin-based powder coating:

- White RAL 9010
- Black RAL 9005
- Grey - matt oxidized-effect finish


Art.8527 - High quality steel turning key with washer

Art. 8632 e 8633 - High quality steel spring supports for easy assembly


Ceiling

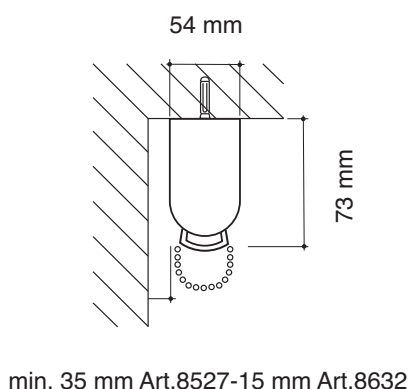

Wall

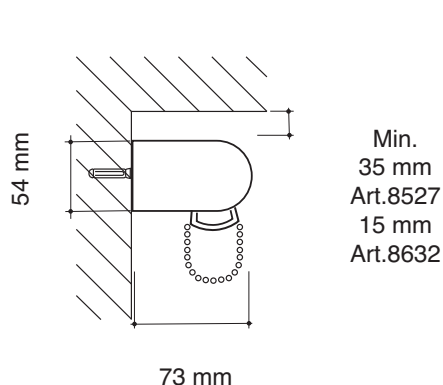


Wall

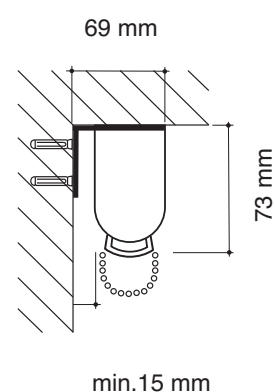

Bottom bar


Standard

Art.8613




Optional

Art. 8455



Optional

Art. 2755



Art. 8613 – 30 × 8 mm extruded 6060 T6 aluminium alloy profile, compliant with UNI EN 755-9, powder-coated with QUALICOAT-certified polyester resin coating:

White – RAL 9010

Black – RAL 9005

Grey – matt oxidised-effect finish

Art. 8455 – Ø 22 mm extruded 6060 T6 aluminium alloy tube, compliant with UNI EN 755-9:

White – RAL 9010

Black – RAL 9005

Grey – anodised

Art. 2755 – Bottom bar made of extruded 6060 T6 aluminium alloy, compliant with UNI EN 755-9:

White – RAL 9010



TENDE INTERNE ED ESTERNE



@rilox.italia



#riloxitalia

Rilox Italia Srl - Cap. Soc. € 150.000,00 I.V.

Via Cascina Borniola, 15/A - 10036 Settimo Torinese (TO) - ITALY

Reg. Imprese Torino - C.F. - P. IVA - 10634150014 - R.E.A. 1149982

Ufficio Registro TORINO 2 - PEC: riloxitalia@pec.it

Tel: (+39) 011 262 5473 - Fax: (+39) 011 22 22 250

www.riloxitalia.it