

Roller Blind




E61 ELECTRIC ROLL




Motorized roller blind.

The Electric Roll roller blind represents the ultimate expression of comfort and technology for light management. Equipped with an integrated motor, it is available with different types of motors — wired, radio-controlled or Wi-Fi — to adapt to user preferences and the characteristics of the electrical system. Ideal for residential, professional and hospitality environments, it offers a quiet and intuitive user experience, with the possibility of integration into home automation systems. Compatible with filtering, blackout and reflective fabrics, it ensures optimal performance in terms of solar protection, privacy and energy efficiency. Suitable for ceiling or wall installation, also for large-size blinds.

Exploded View and dimensions

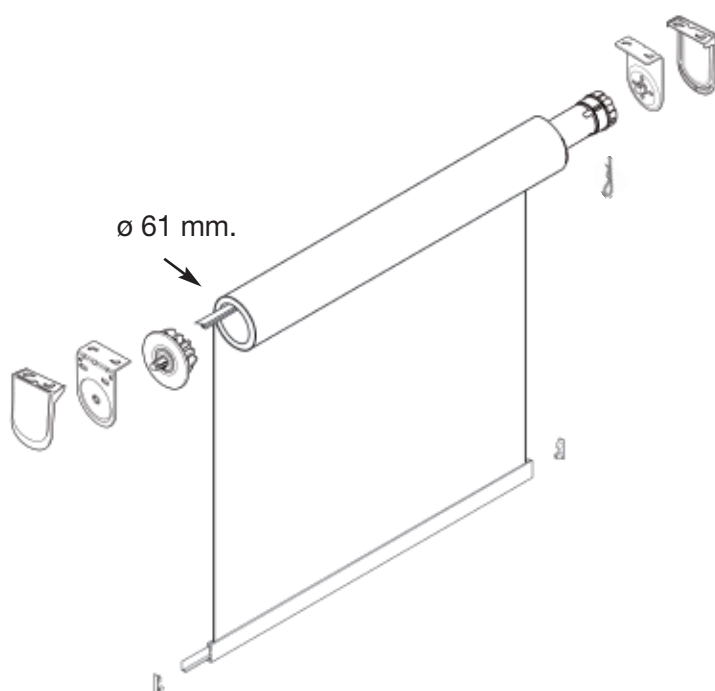

Max. Width 380 cm
Max. Height 380 cm

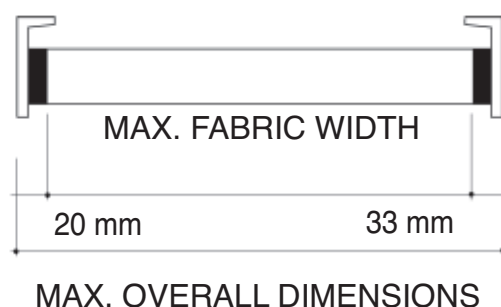

Roll types

Standard



Optional



Roll type B recommended to cover window handle clearance

Art. 8615K61 – Mechanical motor

Standard



Motor specifications:

Mechanical motor. 35x420 mm tube. 2 m cable
 Mechanical end stop, with 38 turns between the limits
 Power supply: 230 Vac; current consumption: 0.64 A; power consumption: 146 W; CE certified; IP44; torque: 6 Nm
 Max. size with 61 mm tube: 380x380 cm (WxH)
 Speed: 28 rpm; silent operation: < 39 dB
 Prepared for smart-home connection via rocker switch

Electrical connection



Art. 8627K61 – Radio motor


Optional



Motor specifications:

Radio motor. 35x530 mm tube. 2 m cable
 Easily programmable electronic end stop with up to 3 intermediate positions
 Power supply: 230 Vac; current consumption: 0.64 A; power consumption: 146 W; CE certified; IP44; torque: 6 Nm
 Max. size with 61 mm tube: 380x380 cm (WxH)
 Speed: 28 rpm; silent operation: < 40 dB
 Prepared for smart-home connection via dry-contact rocker switch

Electrical connection

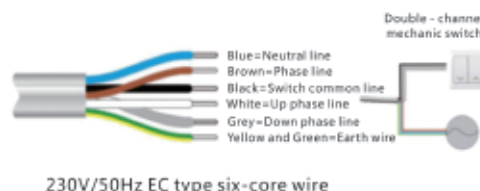

Art. 8616K61 – Wi-Fi radio motor


Optional



Motor specifications:

Radio motor. 35x530 mm tube. 2 m cable
 Easily programmable electronic end stop with up to 3 intermediate positions
 Power supply: 230 Vac; current consumption: 0.64 A; power consumption: 146 W; CE certified; IP44; torque: 6 Nm
 Max. size with 61 mm tube: 380x380 cm (WxH)
 Speed: 28 rpm; silent operation: < 40 dB
 Prepared for smart-home connection via dry-contact rocker switch
 Control via the Tuya app and voice control

Electrical connection

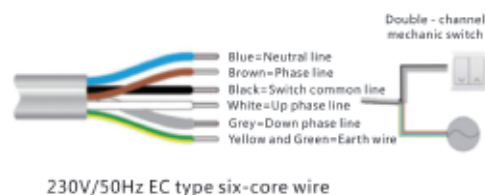

Art. 8626K61 – Radio motor with built-in battery

Optional



Motor specifications:

Radio motor with built-in 4800 mAh battery. 35x685 mm tube

Easily programmable electronic end stop with up to 3 intermediate positions

Power supply: =12V; current consumption: =2.1 A; power consumption: 25.2 W; CE certified; IP44; torque: 2 Nm

Max. size with 61 mm tube: 380x380 cm (WxH)

Speed: 24 rpm; silent operation: < 42 dB


Accessories

Optional



- Art. 8626CB – Battery charger for 8626 motor

Optional

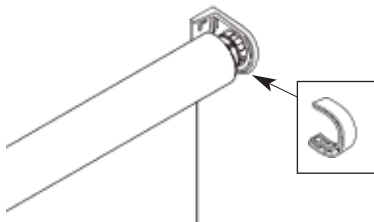

- Art. 8598 cover for motor-head

Control for mechanical motor Art. 8615
Optional

- Art.M-9776-TT wall mechanical switch, indoor use


Remote controls for radio motors
Optional

Art. 8620

- Art.8620 1-channel wall remote-control
- Art.8621 1-channel remote-control
- Art.8622 15-channel remote-control



Art. 8621

Art. 8622


Somfy Motors and Controls
Optional

230Vca tradition motors						
	Type	Features	Wall switch	 Smart Home with Somfy devices - project based quotations 		
	Meccanico Art. M-SONESSE 6	6Nm - 28rpm	Art. M-9776-TT			
MOTORI RADIO 230 Vac						
	Type	Features	Wall switch	1 channel transmitter	4 channel transmitter	15-16 channel transmitter
	Elett.Radio Art. M-SONESSE 6 RTS	6Nm - 28rpm	Art. M-SMOOVE	Art. M-TELIS1-TT	Art. M-TELIS4-TT	Art. M-TELIS16

End cap with ball bearing

Standard



Technical features:

- Steel pin mounted on a ball-bearing that guarantees high resistance and silent functioning
- Pin-holder shaft equipped with a built-in spring, for a quick and safe installation
- End-plug with winglets designed for an easy and accurate coupling with 61 mm tubes

Supports for clutch

Standard



Technical features:


- High-quality steel plates
- Ceiling or wall fixing
- Suitable for 61 mm blinds
- Carter in high-quality technopolymer
- Simple and refined design
- Available colours: white, black, grey

Ø 61 mm tube Art.8656

Standard

Channel for concealed coextruded plastic profile

Rodding winglets to avoid central flexion

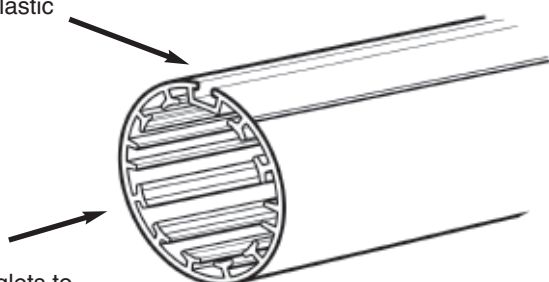


Technical features:

Extruded aluminium alloy roller tube:

- 6060 T6 extruded aluminium alloy tube compliant with UNI EN 755-9


Installation with Art. 8657K supports

Standard





Ceiling

70 mm




Wall

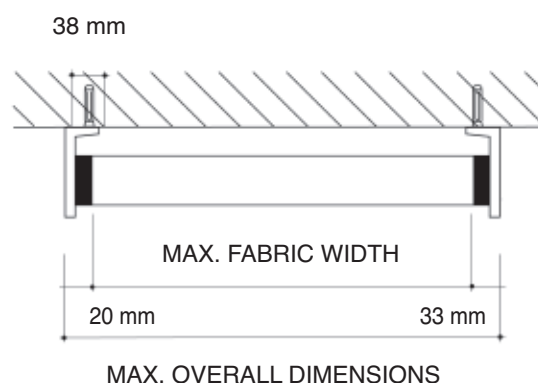

Bottom bar


Standard

Art. 8613




Optional

Art. 8455



Optional

Art. 2755



Art. 8613 – 30 × 8 mm extruded 6060 T6 aluminium alloy profile, compliant with UNI EN 755-9, powder-coated with QUALICOAT-certified polyester resin coating:

White – RAL 9010

Black – RAL 9005

Grey – matt oxidised-effect finish

Art. 8455 – Ø 22 mm extruded 6060 T6 aluminium alloy tube, compliant with UNI EN 755-9:

White – RAL 9010

Black – RAL 9005

Grey – anodised

Art. 2755 – Bottom bar made of extruded 6060 T6 aluminium alloy, compliant with UNI EN 755-9:

White – RAL 9010



@rilox.italia



#riloxitalia

Rilox Italia Srl - Cap. Soc. € 150.000,00 I./V.
Via Cascina Borniola, 15/A - 10036 Settimo Torinese (TO) - ITALY
Reg. Imprese Torino - C.F. - P. IVA - 10634150014 - R.E.A. 1149982
Ufficio Registro TORINO 2 - PEC: riloxitalia@pec.it
Tel: (+39) 011 262 5473 - Fax: (+39) 011 22 22 250

www.riloxitalia.it